

# KIMMON LASER SYSTEM


## IK3552R-G

Wavelength : 325nm Power : 60mW

Transverse Mode : TEM multimode



Dimension (mm)  
IK-G

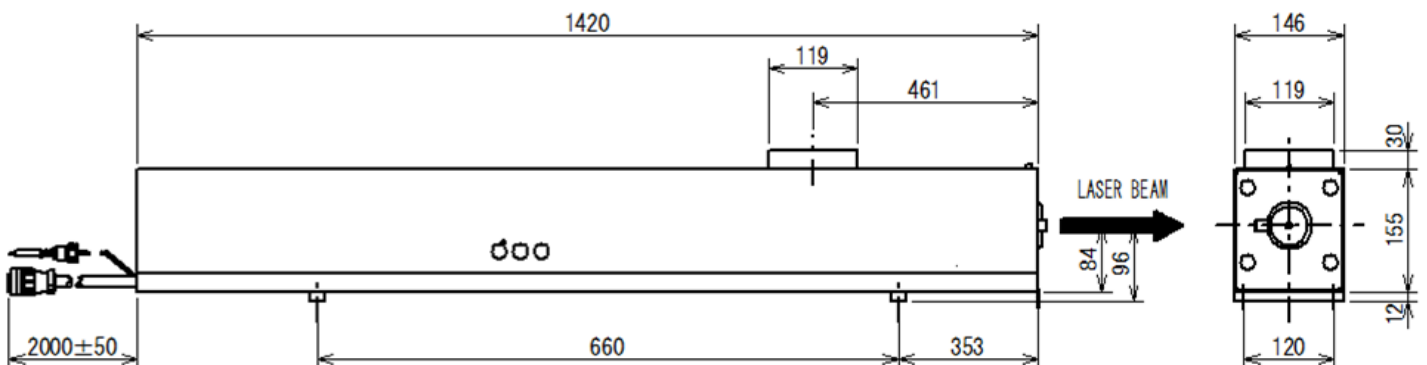

## SPECIFICATIONS

Model	IK3552R-G
Wavelength (nm)	325
Power (mW)	60
Transverse Mode	TEM multimode
Polarization	Linear
Polarization Ratio	> 500:1
Noise, P-P @30kHz~2MHz (%)	< 15
Beam Diameter $1/e^2$ (mm)	< 1.8* <sup>1</sup>
Beam Divergence (mrad)	< 1.0
Beam Pointing Stability ( $\mu$ rad) (At 25°C constant temperature)	$\leq \pm 25$
Warm Up Time (90% power) (minutes)	20
Power Stability (%) (At 25°C constant temperature)	$\leq \pm 2.0$ (4 hours)
Power Stability (10~40°C) (%)	< 20
Environmental Condition (Operation)	Temperature 10~40°C, Humidity $\leq 90\%RH^{*2}$
Environmental Condition (Storage)	Temperature -10~50°C, Humidity $\leq 90\%RH^{*2}$
Shock (with Kimmon packaging) (G)	20* <sup>3</sup>
Dimensions (W×H×L) (mm)	146×197×1420
Weight (kg)	23.5
Laser Class	3B / IIIb

\*1 Measured at 100mm from output coupler

\*2 Non-condensing

\*3 Vertical direction

